

SUPPLY SCOPE (distributor quantities, no material prices): Nudura ICF for the basement extension below the lower-ground floor level, stock forms + 5 % waste - the 450 wall as a 457 core (unassembled XR35 panels on insert webs + 4-way connectors) and the 200 Standard walls with the internal corbel top course. From Ethos' sketch (7.7 x 18 m, 7 courses); position against the existing basement and the official drawing to follow. Raft by others.

QUOTATION - NOT FOR CONSTRUCTION

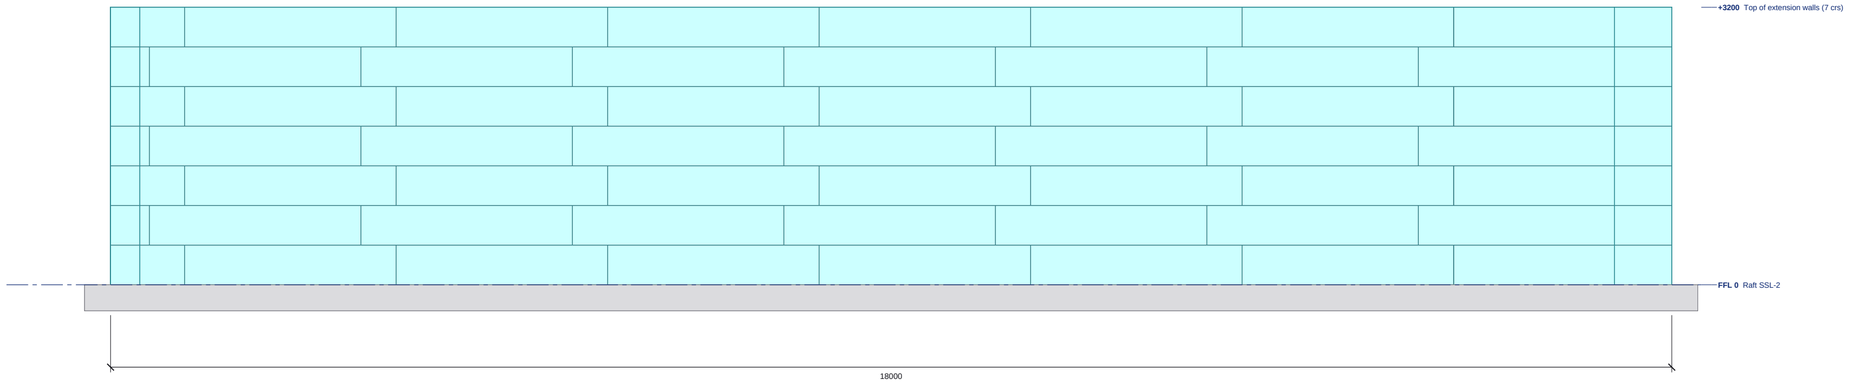

EAST ELEVATION

Scale 1:50 @ A2 | Levels above GF FFL; sills and heads in the schedule

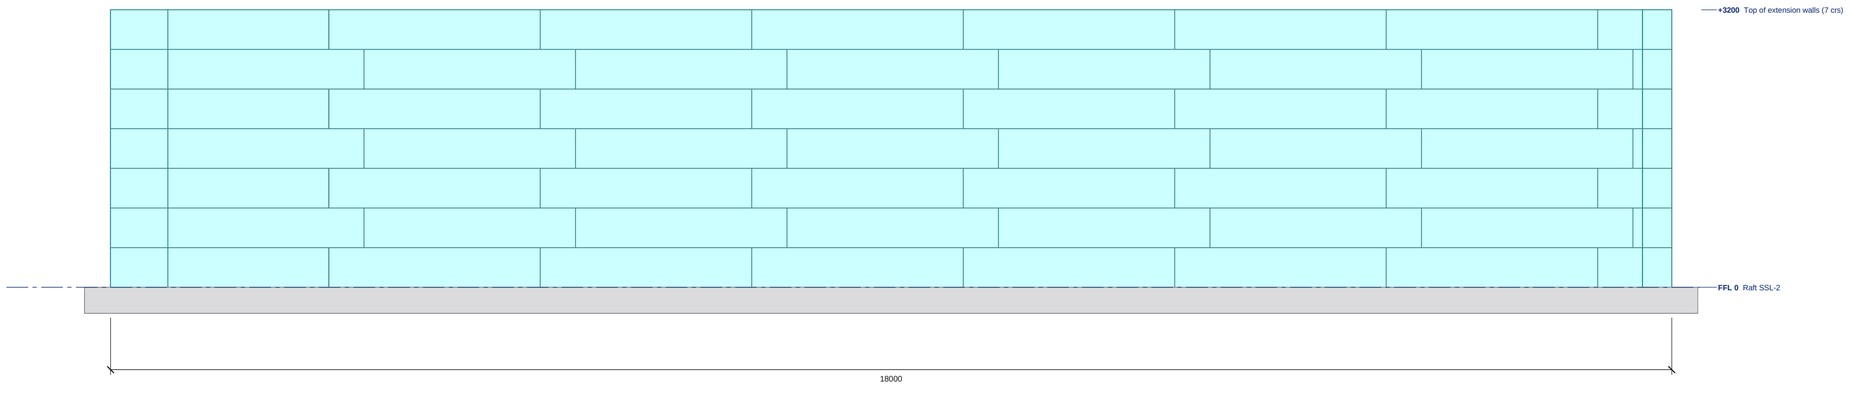

WEST ELEVATION

Scale 1:50 @ A2 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3m

ICF external EPS face
Block course joint
Stack joint

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

EAST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

WEST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

EAST ELEVATION: LEVELS

Level	FFL
Raft SSL-2	0
Top of extension walls (7 crs)	+3200

WEST ELEVATION: LEVELS

Level	FFL
Raft SSL-2	0
Top of extension walls (7 crs)	+3200

NOTES

1. ICF: Nudura 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6; 9.18in XR35 Panel Series, 101.6 EPS + 457.2 core + 101.6 EPS = 660.4. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-088-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = top of the extension raft (assumed at the existing basement raft SSL-2 +40.357 - confirm).
6. From Ethos' extension sketch (7.7 x 18 m, 7 courses); the official drawing to follow.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Ethos Property Developments (Nudura distributor) - Mark Whalley	Basement extension, Badgers Hollow, Alderley Edge

DRAWING TITLE

BASEMENT EXTENSION SIDE ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:50	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-088-EL-02	-